



GB04/4313



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

**PRIORITY  
 DOCUMENT**  
 SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

REC'D 25 OCT 2004
WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.


In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated


15 October 2004

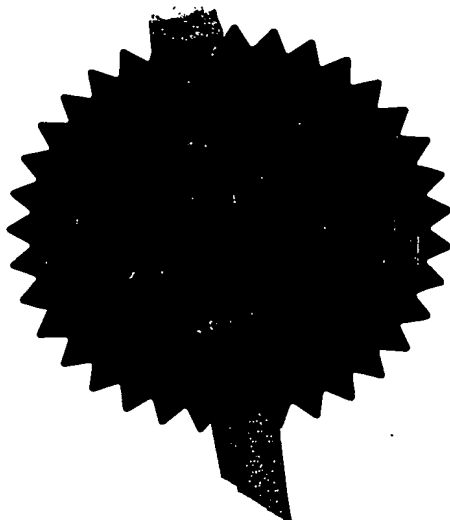

**BEST AVAILABLE COPY**

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

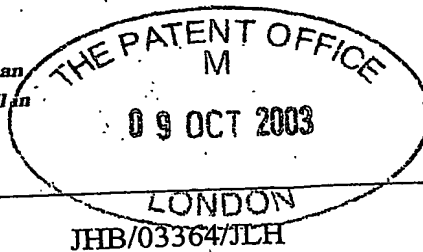

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

1. Your reference

LONDON  
JHB/03364/JLH

2. Patent application number  
(The Patent Office will fill in this part)

0323696.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

ASAHI KASEI KABUSHIKI KAISHA  
2-6 Dojimahama 1-chome, Kita-ku, Osaka-shi  
Osaka 530-8205  
Japan

Patents ADP number (if you know it)

8384216001

If the applicant is a corporate body, give the country/state of its incorporation

Japan

4. Title of the invention

Measurement of Melting Points of Multiple Samples

5. Name of your agent (if you have one)

BROOKES BATCHELLOR LLP

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

1 Brookes Batchellor LLP  
1 102 - 108 Clerkenwell Road  
1 LONDON  
1 EC1M 5SA. 58 22/4/04  
ADP No. 08839276001

Patents ADP number (if you know it)

0000000000

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (d))

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 10 ✓  
Claim(s) 3 ✓  
Abstract - ✓  
Drawing(s) 5+5 ✓

10. If you are also filing any of the following, state how many against each item.

Priority documents -  
Translations of priority documents -  
Statement of inventorship and right to grant of a patent (Patents Form 7/77) -  
Request for preliminary examination and search (Patents Form 9/77) Yes ✓  
Request for substantive examination (Patents Form 10/77) -  
Any other documents (please specify) -

11. I/We request the grant of a patent on the basis of this application.

Signature



Date  
8 October 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

John Blake

01892 510600

**Warning**

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

**Notes**

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

## MEASUREMENT OF MELTING POINTS OF MULTIPLE SAMPLES

### Background of the Invention

This invention is concerned with a method of measuring in particular melting points, but also decomposition points or softening points, for multiple samples of polymers or other substances, and also with apparatus for putting the method into practice. The method of the invention is especially, but not exclusively, suitable for providing melting point values for arrays of polymer samples.

Conventional methods of measuring melting points, such as observing a sample in a capillary tube or use of Differential Scanning Calorimetry (DSC) are time consuming and involve assessing one sample at a time. Even when automated, DSC can deal with only around 12 samples per hour.

The growth of combinatorial chemistry into the polymer field, has resulted in a requirement for rapid assessment of the physical properties of new polymers. In particular there is a need for a melting point measurement system that can be adapted for the screening of multiple samples in a single operation.

### Summary of the Invention

The present invention is based on the finding that visual observations of a sample as it melts can detect a significant change in luminosity or reflectance of the sample consequent upon a change of phase of the sample from solid to liquid and vice versa. The change in luminosity or reflectance can be correlated with the temperature of the sample to give a reproducible melting value that can be used in rapid assessment of the physical properties of the sample. Further, using image processing technology, multiple samples can be screened for luminosity or reflectance changes in a single operation.

In its broadest aspect the present invention provides a method of measuring a temperature value associated with melting, softening or decomposition, comprising:

providing a sample support plate;  
placing a plurality of discrete samples on the support plate;  
varying the temperature of the support plate;  
observing the sample to detect a change in luminosity or reflectance caused by a  
5 change in state of the sample;  
recording the temperature of the plate associated with the change in luminosity or  
reflectance.

The invention has been conceived primarily as a means for rapidly obtaining a melting  
10 point value for comparison of the physical characteristics of the members of a library  
of samples, especially polymer samples. However, the method of the invention may  
also be used to record temperatures associated with other changes of state, such as  
softening or decomposition, which result in a change of luminosity or reflectance.

15 Typically the support plate is a sample tray on which the plurality of samples may be  
arranged in a preferably regular array.

- The support tray may be placed on a heat source, such as a heating element or block  
with a controlled heat input so that its temperature can be varied continuously or  
20 incrementally.

The samples are preferably observed by a imaging device such as a camera, preferably  
a digital camera that can output digital image data. Most suitably a camera that  
provides a continuous output of image data is used, for example, a webcam, so that  
25 the luminosity or reflectance of the sample(s) can be continuously monitored. Most  
preferably the image output of the camera is monitored by image processing software  
arranged so that it monitors areas of the image corresponding to the location of the  
samples on the support plate. To ensure adequate imaging the samples are preferably  
illuminated by a light source so as to give constant luminosity for all experiments.

30

Accordingly a preferred aspect of the invention comprises

forming an array of samples onto a support tray;  
placing the support tray onto a heating device provided with temperature sensing means;  
illuminating the support tray and observing the array of samples by a imaging device;  
5 varying the temperature of the heating device over a temperature range from below the anticipated melting, softening or decomposition point of the samples to above the anticipated melting, softening or decomposition point of the samples;  
feeding the image data from the imaging device to an image recording device during the temperature variation sequence;  
10 recording temperature values for the temperature of the heating device associated with each feed of image data;  
reviewing the image data to detect changes in the image, such as image intensity, at each or selected sample locations;  
logging the temperature of the heating device recorded in respect of an image change  
15 associated with a change in state of a sample.

Most suitably, image processing software is used to detect changes in the image, for example in the intensity of the image, at each sample location. Therefore, in a preferred embodiment of the invention the heating device is provided with  
20 temperature sensing means that gives a computer readable output of the temperature of the block; the imaging device is a digital camera or webcam that feeds images to a computer loaded with the image processing software; the computer records temperature data associated with each image; and the image processing software is used to detect changes in the image intensity at each or selected sample locations; and  
25 the temperature associated with a significant change in intensity is noted.

In a preferred procedure, typically using a webcam as the digital camera, sequential images transmitted to the computer are stored in the computer memory with a temperature value transmitted from the heating block at the time of creation of the  
30 image, and after completion of the heating cycle the stored images are processed to generate data relating to the intensity of the image at selected sample locations, and

the intensity data and temperature data are used to generate a plot of intensity against temperature from which melting point values for the selected samples can be assessed.

The present invention also provides apparatus for measuring melting, softening or decomposition point values comprising:

a heating device provided with temperature sensing means that gives a computer readable output of the temperature of the block;

a sample support tray that can be placed on the heating device to heat samples placed on the support tray;

a camera that can be positioned to observe samples on the support tray;

means for illuminating the samples for observation by the camera;

control means for varying the temperature of the heating block over a temperature range from below the anticipated melting, softening or decomposition point of the samples to above the anticipated melting, softening or decomposition point to the samples;

a computer to receive image data from the digital camera and temperature data from the sensing means on the heating block;

an image processing program loaded in the computer and operable to detect changes in the image received from the digital camera, for example monitoring the intensity of the image, at each or selected sample locations;

recording means to log images at each or selected sample locations and record the temperature of the heating block associated with the images, whereby significant changes in the images can be correlated with the temperature of the heating block.

The invention is described in more detail below, by way of example only, with reference to the accompanying drawings, showing a working embodiment of an apparatus for practising the method of the invention.

#### **Brief Description of the Drawings**

Figure 1 is a schematic side view of apparatus in accordance with the invention;

Figure 2 is a sectional side view of a sample support tray;

Figure 3 shows sequential images provided by a webcam of a loaded sample support tray at different temperatures;

Figures 4 and 5 show sample screen shots from image processing software used for processing images of heated samples;

Figures 6 and 7 show sample plots of image intensity against temperature using values obtained by processing images of heated samples such as organic compounds (Fig. 6) and polymers (Fig. 7).

### **Detailed Description of the Invention**

The present invention makes use of the property that solid substances undergoing a phase change, for example, from solid to liquid on melting, exhibit a change in luminosity or reflectance consequent on a change from a solid form which is substantially opaque to a liquid form which is substantially translucent.

In the present invention this property is used to obtain a temperature value for changes of state, such as melting point, softening point or decomposition point. The main features of the invention are: providing a sample support plate; placing sample compounds or polymers on the support plate; varying the temperature of the support plate; observing the samples to detect a change in luminosity or reflectance caused by a change in state, especially a phase change of the samples; and recording the temperature of the plate when the change in luminosity or reflectance occurs.

Referring to Figure 1 of the accompanying drawings, in a preferred embodiment of the present invention, melting point values, especially of a library of polymer samples, are measured by loading samples (1) of polymers or other substance of interest onto a support tray (2) in a regular array. The support tray (2) is placed onto a heating block (3) provided with temperature sensing means (4) that gives a computer readable output of the temperature of the heating block (3). The samples (1) are viewed by a digital camera (5), conveniently a webcam. The samples (1) are illuminated, for example by light bulbs (7), so that they are viewed under standardised conditions.



When the support tray (2) has been loaded with samples (1) and located on the heating block (3), the temperature of the heating block (3) is varied over a temperature range from below the anticipated melting point of the samples (1) to above the anticipated melting point of the samples (1). During the heating cycle, image data from the digital camera (5) is delivered to a computer (6) loaded with image processing software. The image processing software is used to monitor the intensity of the image of the loaded support tray (2) at each (or a selected) sample location. At the same time temperature data is delivered to the computer (6) from the temperature sensor (4) in the heating block (3), so that the temperature associated with, a change in the image which corresponds to the change in luminosity or reflectance expected to result from a phase change in a sample (1), can be recorded.

Apparatus suitable for measuring melting point values in accordance with the method of this invention includes:

- a heating block (3) provided with temperature sensing means (4) that gives a computer readable output of the temperature of the block;
- a sample support tray (2) that can be placed on the heating block (3) to heat samples (1) placed on the support tray (2);
- a digital camera (5), such as a webcam, that can be positioned to observe samples (1) on the support tray (2);
- light bulbs (7) or other means for illuminating the samples (1) on the support tray (2) so that the samples (1) can be viewed by the digital camera (5);
- control means for varying the temperature of the heating block (3) over a temperature range from below the anticipated melting point of the samples (1) to above their anticipated melting point;
- a computer (6) linked to the digital camera (5) so as to receive image data from the digital camera (5) and temperature data from the sensing means (4) on the heating block (3);
- an image processing program loaded in the computer (6) and operable to detect changes in the digital camera image, for example in the intensity of the image, at each sample location;

recording means, typically in the computer memory, to record images of the sample locations and record the temperature of the heating block (3) associated with the images so that changes in image intensity can be correlated with the temperature of the sample.

5

The system of this invention is in principle operable to measure melting point values from both the phase change liquid-to-solid i.e. allowing the heating block to cool from a temperature above the solidification point of a sample, and for the phase change solid-to-liquid i.e. raising the temperature of the heating block from a temperature below the melting point of a sample. However the most convenient mode of operation is to make measurements by heating the sample to generate the phase change solid-to-liquid, and the invention will be described below on that basis.

10

The term "melting point values" is used rather than "melting point", because the aim of this invention is not so much to provide accurate melting points, which would require accurate calibration of the apparatus used, but to provide mutually consistent melting data that can be used for comparison of the physical properties of multiple samples, for example in a library of polymer samples created using combinatorial preparation techniques. The system can also be used to detect softening points or decomposition points, which will also cause a significant change in the reflectance of a sample.

15

20

As the heating block (2), a customised unit made by Ventacon (Winchester, Hants, UK) has been successful This may be connected to an autotune temperature controller such as Model 3300 from Cal Controls Ltd (Hitchin, Herts., UK). Suitable illumination for operation of the digital camera (5) is provided by two tubular strip lamps (284 mm length, 60 watts). The digital camera (5) may be a low-cost webcam, and preferably provides image data at a minimum of one frame per second. As a webcam, the Quickcam Model from Logitech has been successfully used.

25

30

Although the system of the invention may be used for single samples, or a small number of samples, a key aim of the invention is to provide rapid screening of multiple samples, such as a library of polymer samples obtained using combinatorial techniques.

5

Using the webcam mentioned above at a distance of 55 mm from the sample tray, satisfactory images for image processing have been obtained using a 60 mm x 60 mm sample tray provided with 45 (an array of 9 x 5) sample cells of 2 mm diameter.

10 As shown in Figure 2, a sample support tray (20) is preferably formed with depressions (21) to act as sample cells. The depressions may be formed for example by punching and deformation of a metal sheet or by drilling. The cells are not essential, but serve to ensure that the samples are placed in a regular array for recognition by the image processing software, and also to prevent undesirable  
15 spreading of liquefied samples. To avoid contamination of subsequent samples the support tray is preferably disposable after use. To emphasise the contrast between opaque samples and translucent liquid samples, the support tray preferably has a black finish. Then in a monochrome image, the samples appear to be "white" so that the phase change effectively is a transition from a "white" image of an opaque solid  
20 sample and a "black" image where a transparent liquid effectively has a similar intensity as the background. Figure 3 shows sequential images from a webcam observing samples on a black tray in a procedure in accordance with this invention. The change from white sample to black background at a sample location is highlighted.

25

The image processing software needs to be capable of assessing changes in selected areas of the webcam image corresponding to sample locations. The selection may be made manually using a mouse or other pointing device. The software may also be set up to automatically examine pre-selected areas corresponding to the fixed array of  
30 sample locations of the sample support tray. The software needs to be able to detect a change of colour intensity, which when the support tray is configured as above, is a

change from white to black in the selected area of a monochrome image. The "change" event can then be recorded with an identifier of the sample location and previously-input data to uniquely identify each sample location of the array of samples under test, together with the temperature output from the sensor in the heating block at the time of the change. Depending on the frame rate of the image data output from the webcam, it may be possible for the software to produce a melting profile for each sample. The commercially available Image Plus Pro system of Media Cybernetics (Carlsbad, Calif., USA) has been used successfully in the system of this invention.

- 10 The principles of the system of this invention have been described above as effectively a "real-time" procedure, so as to explain the essential elements of the system. However, rather than detecting the image changes in real-time, it may be more convenient and efficient to record sequential images of the samples as the heating block is heated through the expected melting point range. The image data can then be analysed in respect of selected samples of interest.

In a typical procedure, the heat controller is set to raise the temperature of the heating block, and the sample tray, at 10 °C per minute. The image data obtained by the webcam is stored, and then subsequently examined at one image every 5 seconds to reduce the amount of data to be processed. This means that one image is assessed for each 0.5 °C rise in temperature, which is sufficient for screening purposes. The image sequence is recorded on grey scale or in colour, where white pixels have the maximum intensity and black pixels no intensity. Selected samples are "tagged" for processing by the software in the first image from the webcam i.e. where all the samples are solid. The "white" intensity of the each tagged spots are determined by the software and can be exported to a spreadsheet to give a plot of intensity against temperature. Figures 4 and 5 show sample screen shots from the Image Plus Pro displayed during this procedure. From this plot the change of white to colourless i.e. equivalence to the black background, can be assessed, and hence the change in phase from solid to liquid detected. The melting point value can be assessed by the user of the software from the plot, or suitable threshold values can be pre-set to allow an

automatic computation of the melting point value. Some sample plots are shown in Figures 6 and 7. As shown, several plots can be combined in a single display so that the properties of multiple samples can be compared.

## 5 Industrial Applicability

The melting point measurement system described above is particularly suitable for the screening of multiple samples in a single operation. This allows rapid assessment of the physical properties of new polymers prepared using combinatorial chemistry techniques. As a result, new polymers having properties useful for further development for specific industrial and other uses can be rapidly identified.

**CLAIMS**

1. A method of measuring a temperature value associated with melting, softening  
5 or decomposition, comprising:  
providing a sample support plate;  
placing a plurality of discrete samples on the support plate;  
varying the temperature of the support plate;  
observing the sample to detect a change in luminosity or reflectance caused by a  
10 change of state of the sample;  
recording the temperature of the plate associated with the change in luminosity or  
reflectance.
2. A method according to claim 1 in which images of the sample support plate  
15 are reviewed to detect a change of image intensity at sample locations, consequent on  
a change of state of the sample.
3. A method according to claim 2 in which an imaging device feeds images of  
the sample support plate to a computer, and a temperature sensing device feed  
20 temperatures to the computer for association with the images, and image processing  
software is used to review the images to detect changes in image intensity, so that  
changes in intensity consequent upon a change in state of the sample can be associated  
with a temperature value.
- 25 4. A method of measuring temperature value associated with melting, softening  
or decomposition, comprising:  
forming an array of samples on a support tray;  
placing the support tray onto a heating device provided with temperature sensing  
means;  
30 illuminating the support tray and observing the array of samples by an imaging device;  
varying the temperature of the heating device over a temperature range from below the  
anticipated melting, softening or decomposition point of the samples to above the  
anticipated melting, softening or decomposition point of the samples;

feeding image data from the imaging device to an image recording device during the temperature variation sequence;

recording temperature values for the temperature of the heating device associated with each feed of image data;

5 reviewing the image data to detect changes in the image, such as image intensity, at each or selected sample locations;

logging the temperature of the heating device recorded in respect of an image change associated with a change in state of a sample.

10 5. A method according to claim 4 in which image processing software is used to detect changes in the image, for example the white intensity of the image, at each sample location.

15 6. A method according to claim 5 in which the heating device is provided with temperature sensing means that gives a computer readable output of the temperature of the block; the imaging device is a digital camera or webcam that feeds images to a computer loaded with the image processing software; the computer records temperature data associated with each image; and the image processing software is used to detect changes in the image intensity at each or selected sample locations; and  
20 the temperature associated with a significant change in intensity is noted.

25 7. A method according to claim 6 in which sequential images transmitted to the computer are stored in the computer memory with a temperature transmitted from the heating block at the time of creation of the image, and after completion of the heating cycle the stored images are processed to generate data relating to the intensity of the image at selected sample locations, and the intensity data and temperature data are used to generate a plot of intensity against temperature from which melting point values for the selected samples can be assessed.

30 8. Apparatus for measuring melting point values comprising:

a heating device with temperature sensing means that gives a computer readable output of the temperature of the block;

a sample support tray that can be placed on the heating device to heat samples placed on the support tray;

5 a camera that can be positioned to observe samples on the support tray; means for illuminating the samples for observation by the camera;

control means for varying the temperature of the heating device over a temperature range from below the anticipated melting, softening or decomposition point of the samples to above the anticipated melting, softening or decomposition points of the  
10 samples;

a computer to receive image data from the camera and temperature data from the sensing means on the heating block;

recording means to log images at each or selected sample locations and record the temperature of the heating block;

15 an image processing program loaded in the computer and operable to review the images received from the camera, for example monitoring the intensity of the image at each or selected sample locations;


whereby significant changes in the images can be correlated with the temperature of the heating block.

20


9. Apparatus according to claim 8 in which the camera is a digital camera or webcam transmitting image data to the computer during the heating sequence.



**Fig 1 : Schematic side view of apparatus in accordance with the invention**

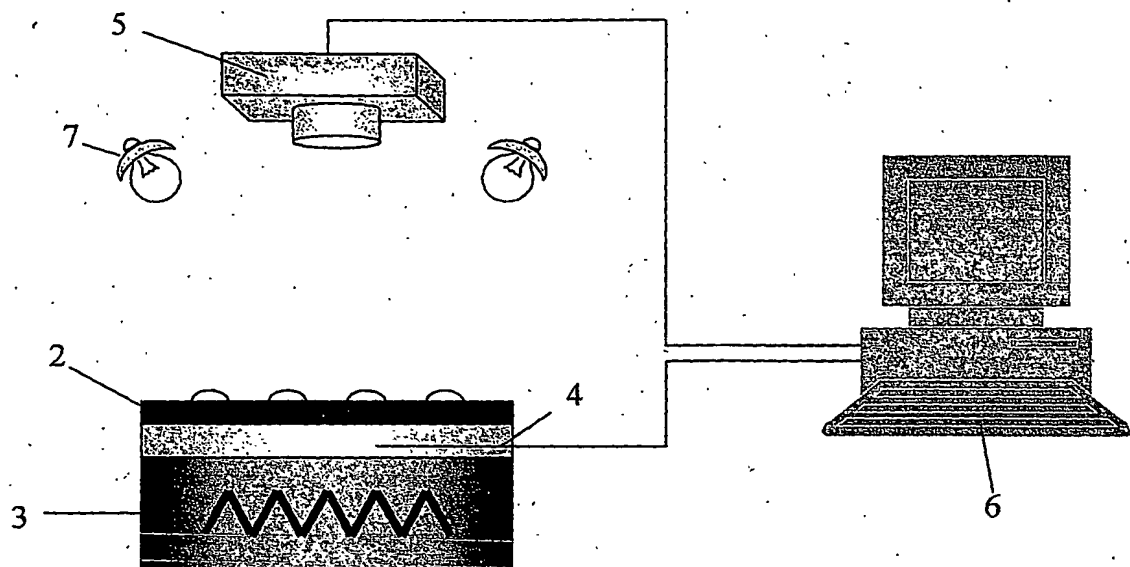

**Fig 2 : Sectional side view of a sample support tray**

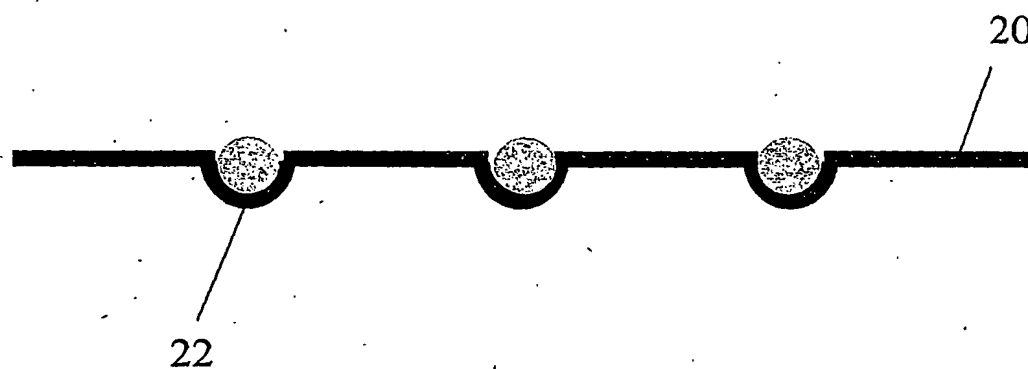

**Fig 3 : Sequential images provided by webcam of a loaded sample support tray at different temperatures**

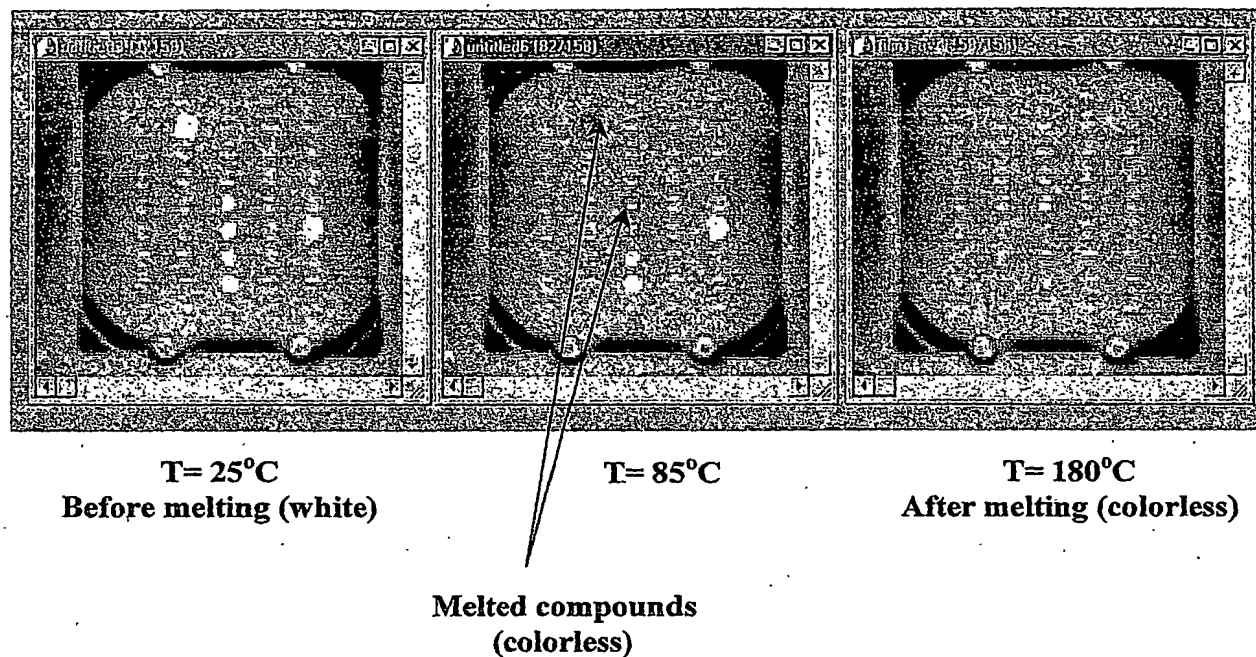


Fig 4 : Sample screen shot from image processing software



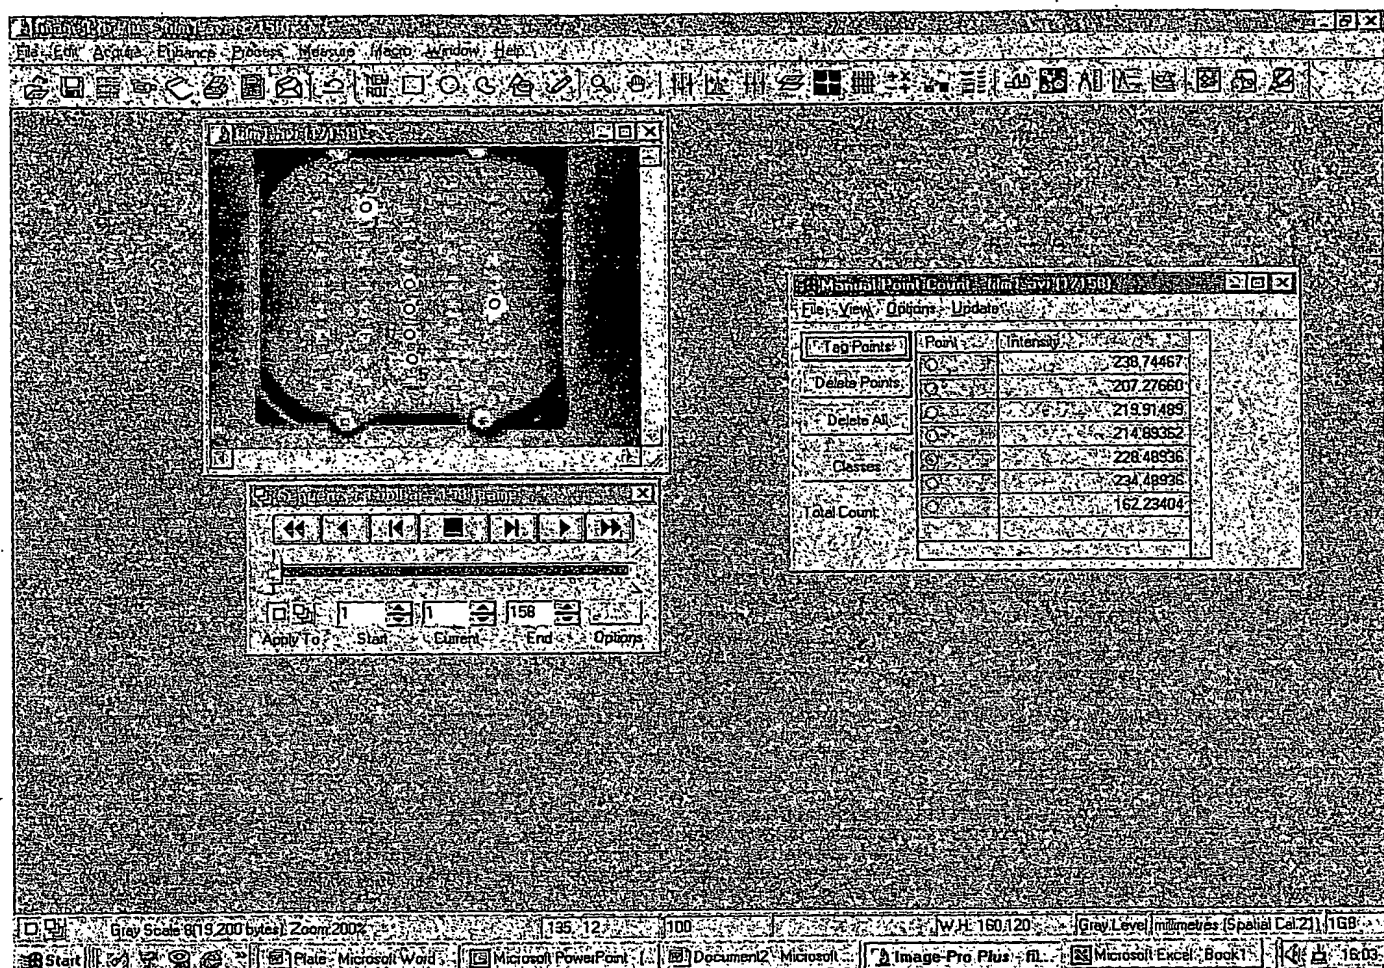



Fig 5 : sample screen shot from image processing software

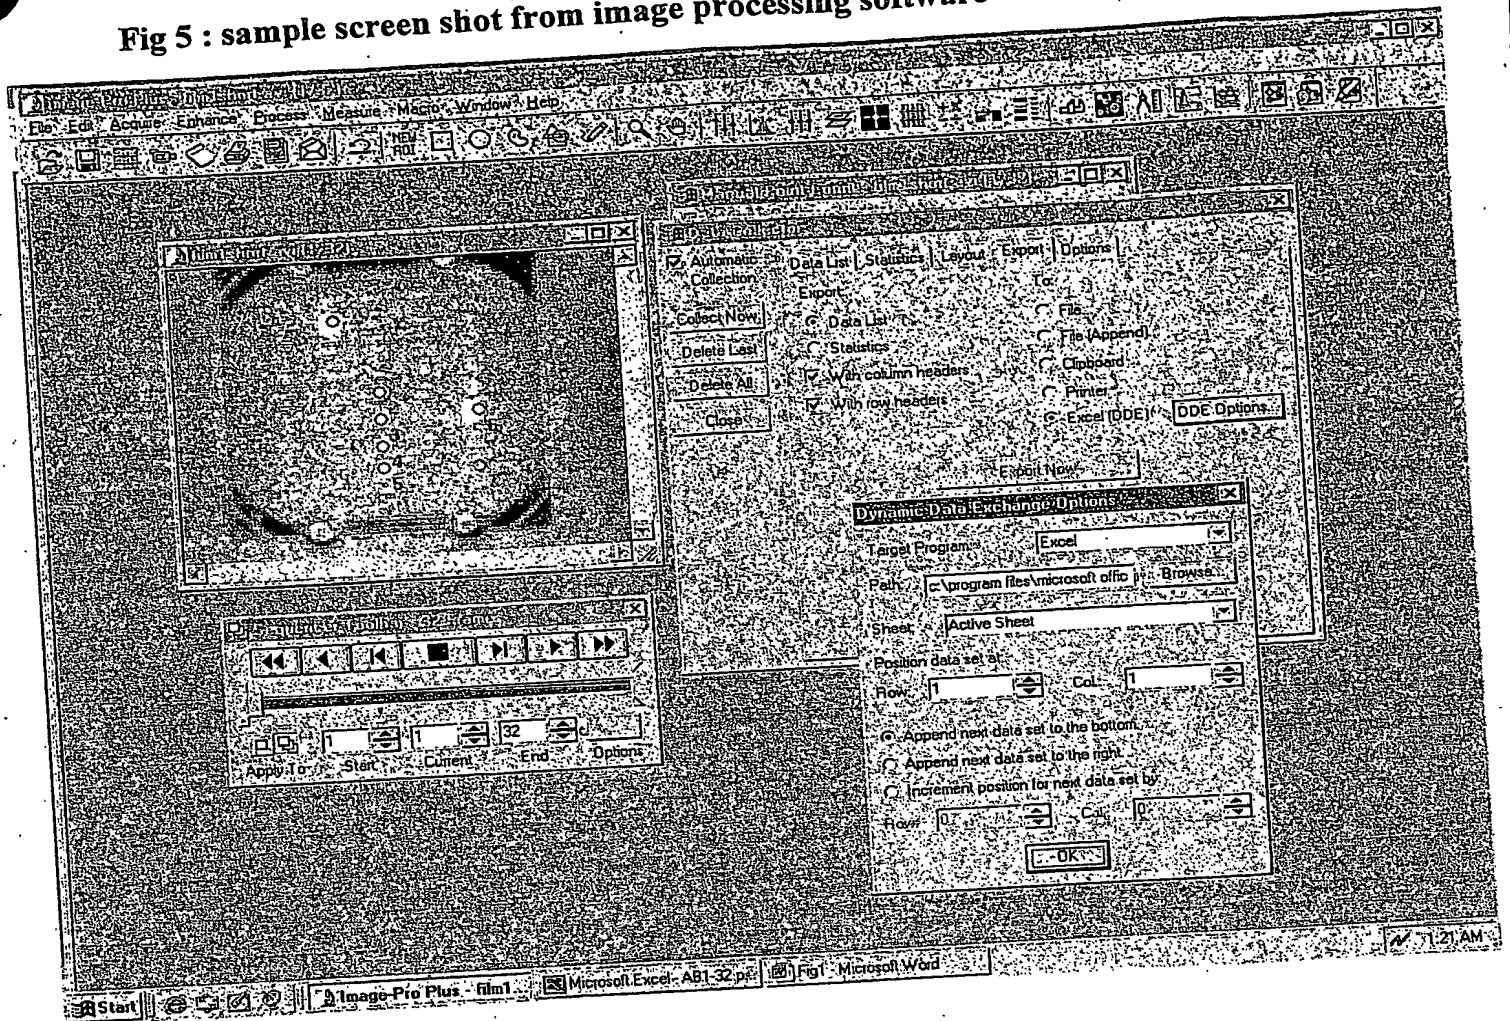

**Fig 6 : Melting point of organic compounds**

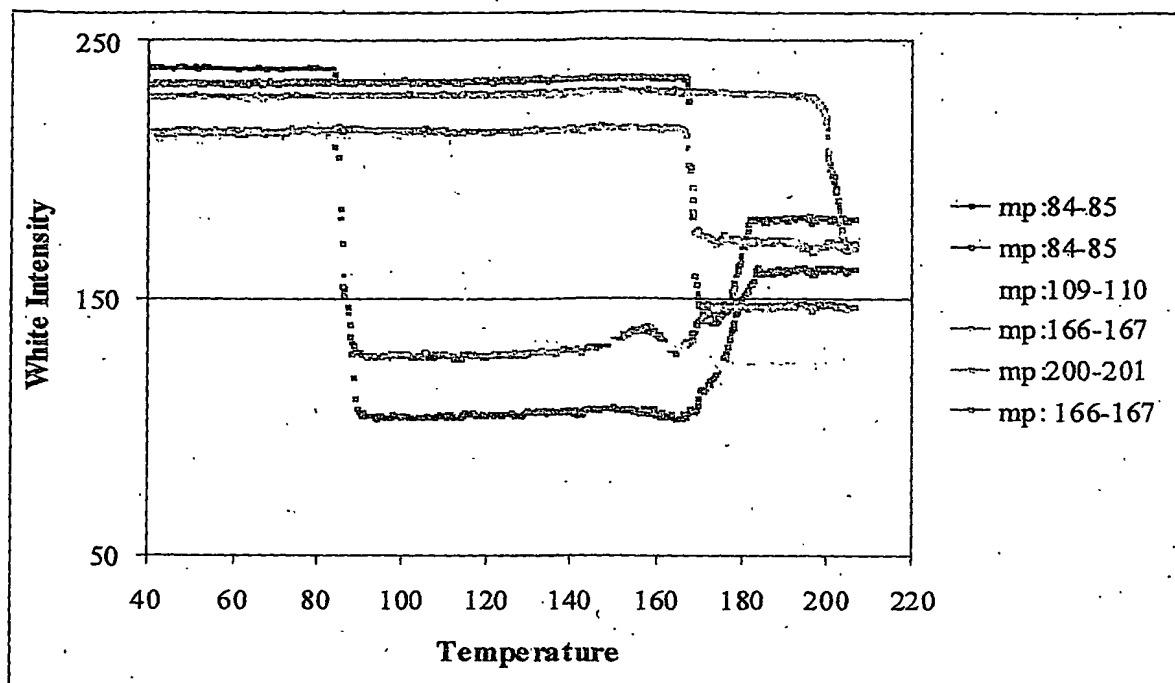

**Fig 7 : Melting point of polymers**

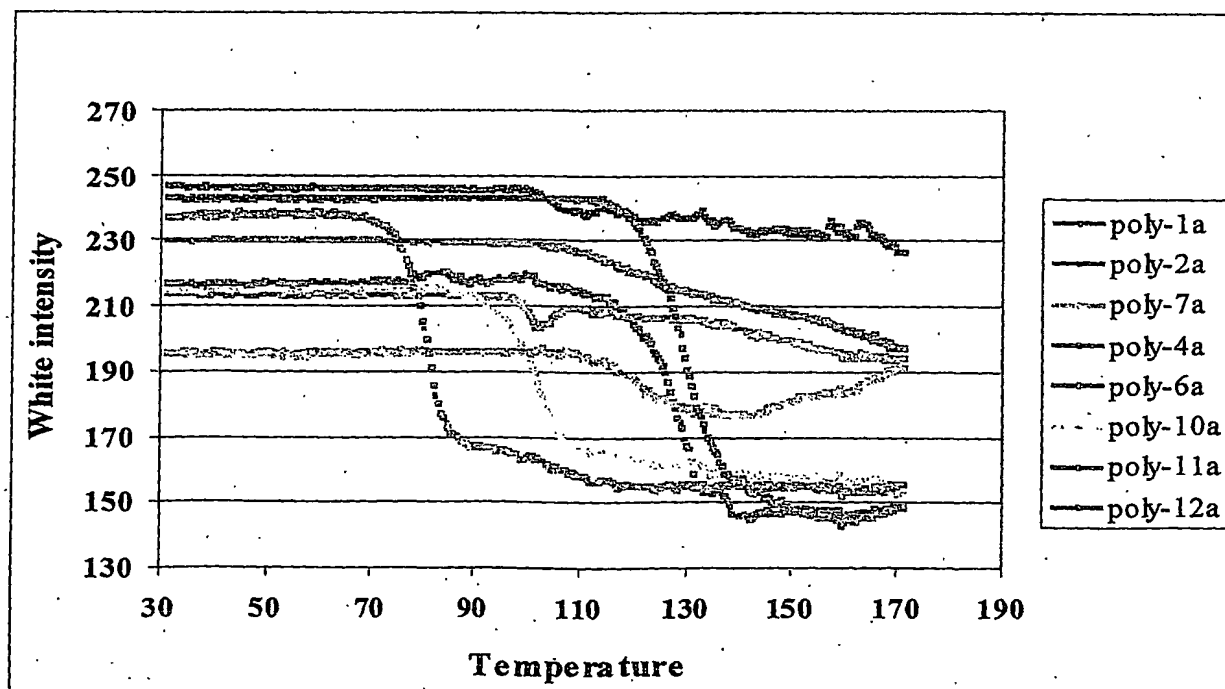

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**